



OEM DPSS Laser Source

AQS Series OEM




Features

- Compact Air Cooled Source
- Low Power Consumption
- Rep. Rate till 200KHz
- Small Footprint
- Configurable Beam Expander
- Red Aiming Beam
- Remote Software Interface & Diagnostic
- Marking version available

Applications

- Industrial Marking
- Material Processing
- ID
- Fine Ablation
- OEM solution for easy integration

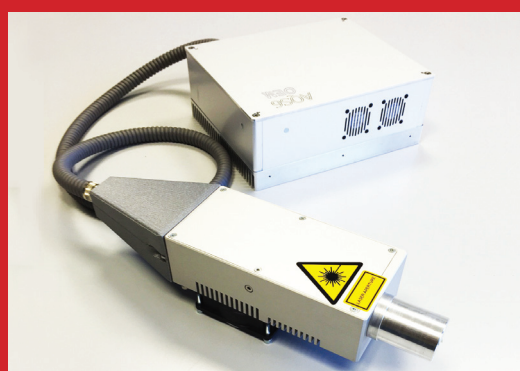


OEM DPSS Laser Source

AQS Series OEM

	AQS6	AQS10
Laser Type Medium	Nd:YVO ₄	
Wavelength	[nm]	1064
Average Power	[W]	6 CW
Rep. Rate	[kHz]	10 - 100 in Q-Switch
Beam quality	[M ²]	<1.3
Power Supply	24 VDC-350W	100-240V,50/60Hz-300VA, 1,5A max
Cooling	Air to Air	
Communication (*)	Profibus or Ethernet - Laser Controlling; DB25; Diagnostic: RS232	

AQSSeries OEM Layout

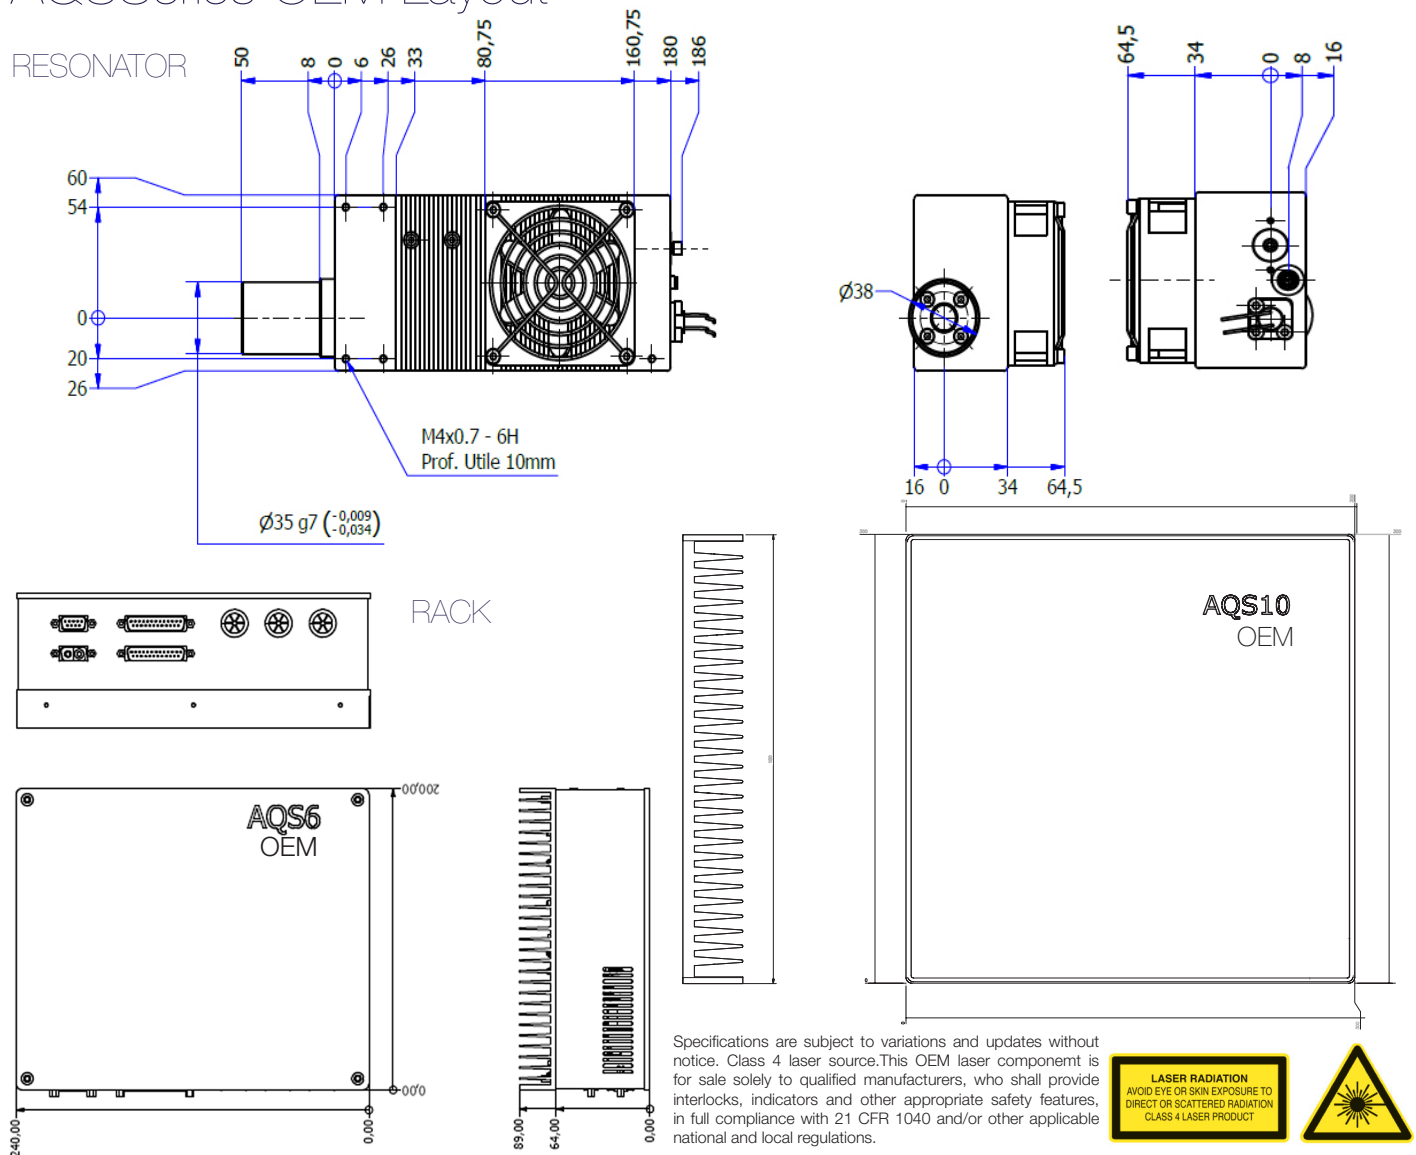

GAP Laser Systems s.r.l.
 A Certified and ISO 9001:2008 Company
 Commerciale: Claudio Roz Tel. 335 6228611
 claudio.roz2018@gmail.com

Claudio Roz
 Coding & Labelling Specialist Cell. 335 6228611

GAP LASERSYSTEMS **TOSHIBA**

HITACHI
 Inspire the Next
 E-mail: cr@cr-coding.eu

TSC
 The Smarter Choice.
 www.cr-coding.eu

